

ALPHA PACKAGING SPECIFICATION

| DIMENSION | CARTON | | | PALLET | | | CONTAINER | | | |
|------------|--------|-------------|----------|--------|-------------|----------|-----------|--------|----------|-------------|
| | Pieces | Weight (kg) | Sq.Meter | Carton | Weight (kg) | Sq.Meter | Carton | Pallet | Sq.Meter | Weight (kg) |
| 300x300 mm | 17 | 25.6 | 1.53 | 72 | 1868 | 110.16 | 792 | 11 | 1211.76 | 20550 |

Remarks :

The "kg/pallet" is included 25kg pallet weight | B1a = <0.5% water absorption | B1b = >0.5 To <3 % water absorption

- Slight variation in size and shade are inherent in manufacture of tiles. Tiles are packed into cartons marked in accordance with relevant manufacturing standard and information. It is recommended that before laying, several cartons be opened and paved in trial. A tiling gap of at least 2.5 - 3.0mm for wall and 3.0 - 5.0mm for floor is recommended for installation.
- Each different tile series is produced to meet different requirements. For specific product technical performance, please required it from our marketing/customer service team.
- Due to the printing process, the colours of actual products may differ from samples.

TECHNICAL SPECIFICATION FOR ALPHA PORCELAIN TILES

| SYMBOL | TEST | SPECIFICATION | |
|-------------|--|----------------------|----------------------|
| | | MS ISO 13006: 2020 | YLI |
| | Water Absorption (%) | 0.5% < E ≤ 3 % | 0.5% < E ≤ 3 % |
| | Dimension : Length & Width (for non-rectified tiles) | ± 0.60% (max ±2.0mm) | ± 0.50% (max ±2.0mm) |
| | Dimension : Length & Width (for rectified tiles) | ± 0.30% (max ±1.0mm) | ± 0.25% (max ±1.0mm) |
| | Thickness | ± 5.0% (max ±0.5mm) | ± 4.0% (max ±0.5mm) |
| | Straightness Of Side (mm) for non-rectified tiles | ± 0.50% (max ±1.5mm) | ± 0.50% (max ±1.5mm) |
| | Straightness Of Side (mm) for rectified tiles | ± 0.30% (max ±0.8mm) | ± 0.30% (max ±0.8mm) |
| | Rectangularity (mm) for non-rectified tiles | ± 0.50% (max ±2.0mm) | ± 0.50% (max ±2.0mm) |
| | Rectangularity (mm) for rectified tiles | ± 0.30% (max ±1.5mm) | ± 0.30% (max ±1.5mm) |
| | a) Centre Curvature for non-rectified tiles | ± 0.50% (max ±2.0mm) | ± 0.50% (max ±2.0mm) |
| | a) Centre Curvature for rectified tiles | ± 0.40% (max ±1.8mm) | ± 0.40% (max ±1.8mm) |
| | b) Edge Curvature for non-rectified tiles | ± 0.50% (max ±2.0mm) | ± 0.50% (max ±2.0mm) |
| | b) Edge Curvature for rectified tiles | ± 0.40% (max ±1.8mm) | ± 0.40% (max ±1.8mm) |
| | c) Warpage for non-rectified tiles | ± 0.50% (max ±2.0mm) | ± 0.50% (max ±2.0mm) |
| | c) Warpage for rectified tiles | ± 0.40% (max ±1.8mm) | ± 0.40% (max ±1.8mm) |
| | Surface Quality* | 95% | 95% |
| | Modulus Of Rupture | Min 30 N/mm2 | Min 30 N/mm2 |
| | Scratch (Moh's Hardness Scale) | - | Min 6 |
| | Abrasion Resistance (PEI) | | Min Class III |
| | Chemical Resistance To | a) Acid | GLA - GLC |
| b) Alkaline | | GLA - GLC | Comply |
| | Chemical Resistance To Stain | Min Class 3 | Min Class 3 |
| | Crazing Test | No Crazing | No Crazing |

* Free from visible defect

SHADE & TONE VARIATIONS



V1
UNIFORM
SHADE & TONE



V2
SLIGHT
VARIATION



V3
MEDIUM
VARIATION



V4
STRONG
VARIATION

YI-LAI MARKETING SDN BHD (459342-W)

(Wholly Owned Subsidiaries Of YB Ventures Berhad)

Office & Showroom In Malaysia

| | | |
|-----------------|--|----------------|
| Selangor | No.8, Jalan 51A/241, Seksyen 51A, 46100 Petaling Jaya, Selangor | +603-7875 4388 |
| Johor | No.15 & 16, Jalan Tropika 1, Taman Tropika, 81000 Kulai, Johor | +607-663 7523 |
| Melaka | No.65, Jalan Suria 1, Taman Malim Jaya, 75250 Melaka | +606-336 7128 |
| Penang | 97-1-16, The Palazzia, Jalan Bukit Gambir, 11700 Gelugor, Pulau Pinang | +604-659 8218 |
| Perak | No. 46A, Jalan Bendahara, 31650 Ipoh, Perak | +605-241 3729 |

YI-LAI TRADING PTE LTD (198204735-E)

Marketing Office In Singapore


2 Sims Close #06-06 Gemini@Sims
Singapore 387298
+65-6842 0163

PIZARRA

PORCELAIN



PIZARRA

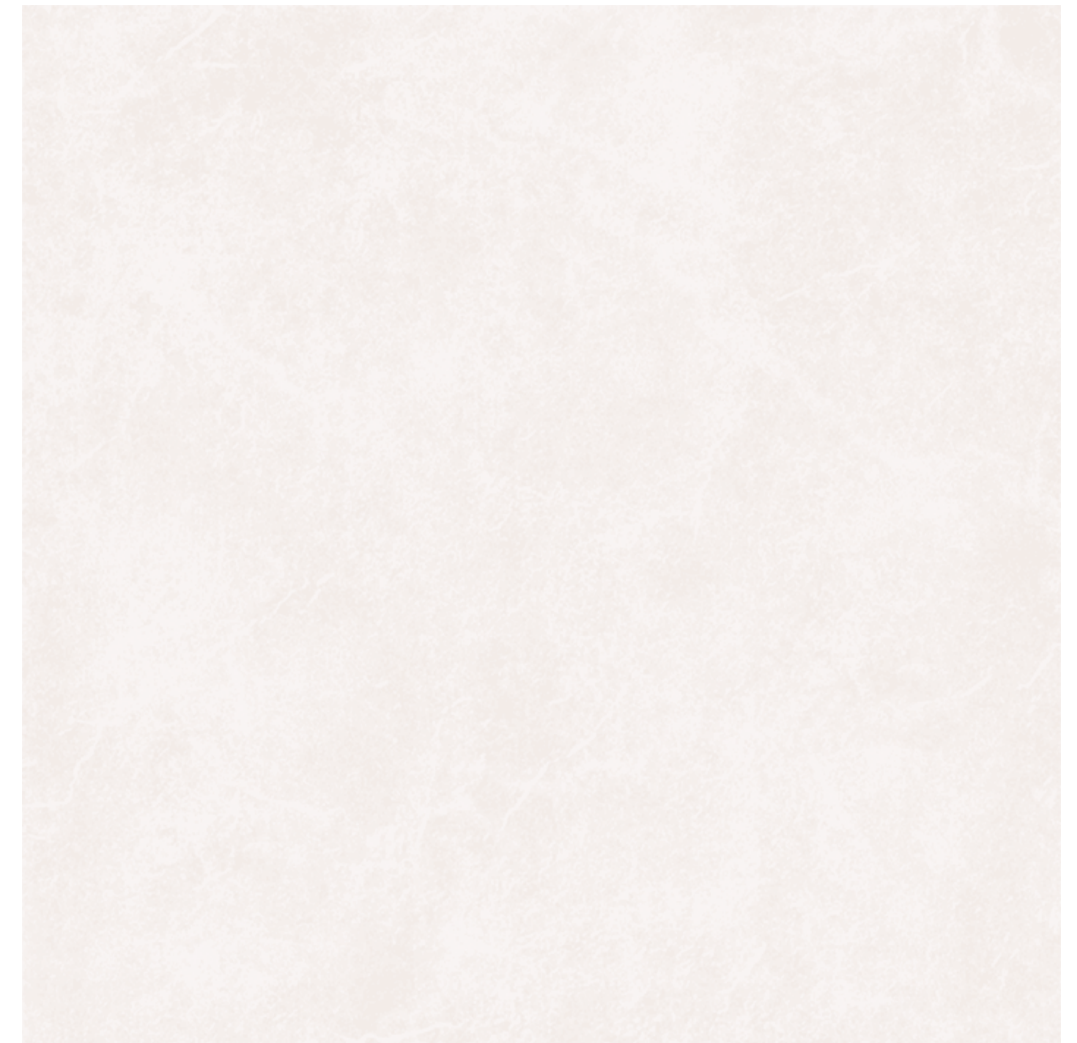


Pizarra 300X300 mm 1 random face



DARK GREY
YL30PZ00PE 300X300 mm



WHITE
YL30PZ01PE 300X300 mm



BEIGE
YL30PZ02PE 300X300 mm



BROWN
YL30PZ03PE 300X300 mm



GREY
YL30PZ04PE 300X300 mm



| | |
|-------------------------|---------------|
| TYPE | Porcelain |
| SURFACE | Structured |
| SIZES | 300X300 mm |
| SHADE VARIATION | V2 |
| TILE EDGES | Non-rectified |
| WATER ABSORPTION | B1b |
| NUMBER OF FACES | 1 |