

YI-LAI MARKETING SDN BHD (459342-W)

(Wholly Owned Subsidiaries of YB Ventures Berhad)

Office & Showroom In Malaysia:

Selangor

No. 8, Jalan 51A/241, Seksyen 51A, 46100 Petaling Jaya, Selangor
+603-7875 4388

Johor

No. 15 & 16, Jalan Tropika 1, Taman Tropika, 81000 Kulai, Johor
+607-663 7523

Melaka

No. 65, Jalan Suria 1, Taman Malim Jaya, 75250 Melaka
+606-336 7128

Penang

97-1-16, The Palazzia, Jalan Bukit Gambir, 11700 Gelugor, Pulau Pinang

Perak

No. 46A, Jalan Bendahara, 31650 Ipoh, Perak
+605-241 3729

YI-LAI TRADING PTE LTD (198204735-E)

Marketing Office In Singapore:

2 Sims Close #06-06 Gemini@Sims Singapore 387298
+65-6842 0163

ROCCA
H O M O G E N E O U S | S T R U C T U R E




MODEL: YLH63RC05C




MODEL: YLH63RC00C


ROCCA

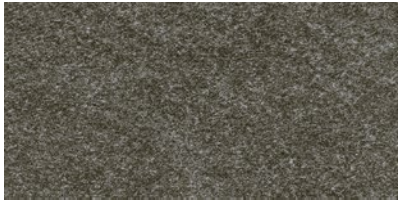

YLH63RC00C
300x600mm
Black



YLH30RC00
300x300mm
Black

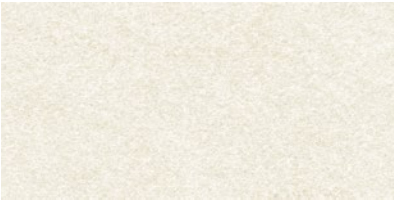

YLH63RC01C
300x600mm
Light Beige



YLH30RC01
300x300mm
Light Beige



YLH63RC02C
300x600mm
Light Yellow




YLH30RC02
300x300mm
Light Yellow




YLH63RC03C
300x600mm
Brown



YLH30RC03
300x300mm
Brown

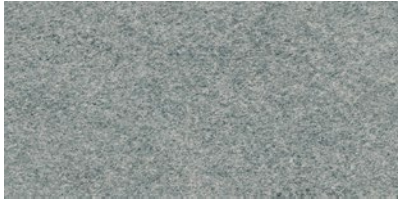


YLH63RC04C
300x600mm
Blue Grey



YLH30RC04
300x300mm
Blue Grey




YLH63RC04LC
300x600mm
Light Blue



YLH30RC04L
300x300mm
Light Blue



YLH63RC05C
300x600mm
Dark Brown



YLH30RC05
300x300mm
Dark Brown



YLH63RC06C
300x600mm
Light Brown



YLH30RC06
300x300mm
Light Brown

APPLICATION:



Wall



Floor



Indoors



Outdoors



Residential




Commercial



Wet Area




Dry Area

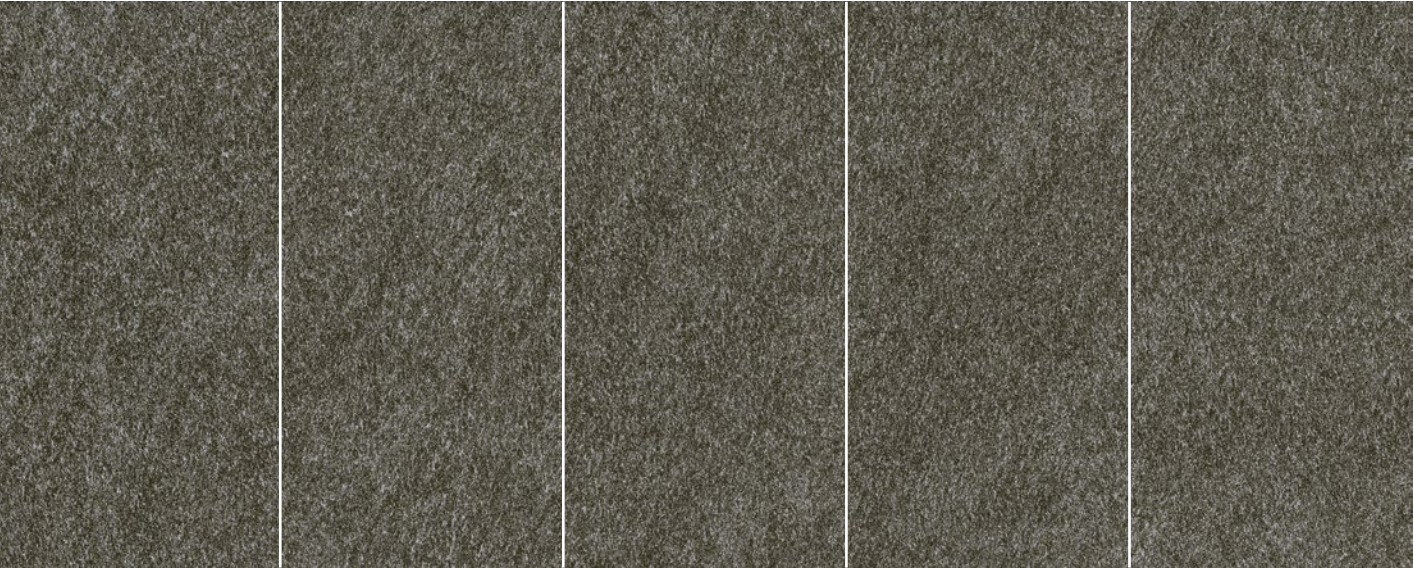

300x600mm Faces: 5 face

Tile Properties: Homogeneous | Bla | V2
Physical Appearance: Structure | Rectified

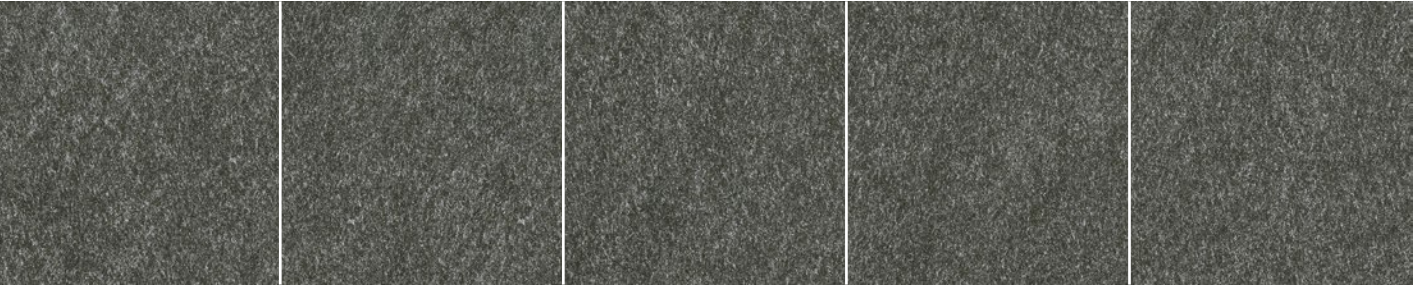

300x300mm Faces: 5 face

Tile Properties: Homogeneous | Bla | V2
Physical Appearance: Structure | Non-rectified

TECHNICAL SPECIFICATION FOR ALPHA HOMOGENEOUS TILE			
Symbol	Test	Specification	
		MS ISO 13006: 2020	YLI
	Water Absorption(%)	E≤0.5%	E≤0.1%
	Dimension: Length & Width (for non-rectified tiles)	±0.60% (max±2.0mm)	±0.50% (max±2.0mm)
	Dimension: Length & Width (for rectified tiles)	±0.30% (max±1.0mm)	±0.25% (max±1.0mm)
	Thickness	±5.0% (max±0.5mm)	±4.0% (max±0.5mm)
	Straightness Of Side (mm) for non-rectified tiles	±0.50% (max±1.5mm)	±0.50% (max±1.5mm)
	Straightness Of Side (mm) for rectified tiles	±0.30% (max±0.8mm)	±0.30% (max±0.8mm)
	Rectangularity (mm) for non-rectified tiles	±0.50% (max±2.0mm)	±0.50% (max±2.0mm)
	Rectangularity (mm) for rectified tiles	±0.30% (max±1.5mm)	±0.30% (max±1.5mm)
	a) Centre Curvature for non-rectified tiles	±0.50% (max±2.0mm)	±0.50% (max±2.0mm)
	a) Centre Curvature for rectified tiles	±0.40% (max±1.8mm)	±0.40% (max±1.8mm)
	b) Edge Curvature for non-rectified tiles	±0.50% (max±2.0mm)	±0.50% (max±2.0mm)
	b) Edge Curvature for rectified tiles	±0.50% (max±2.0mm)	±0.50% (max±2.0mm)
	c) Edge Curvature for non-rectified tiles	±0.40% (max±1.8mm)	±0.40% (max±1.8mm)
	c) Edge Curvature for rectified tiles	±0.50% (max±2.0mm)	±0.50% (max±2.0mm)
	Surface Quality*	±0.40% (max±1.8mm)	±0.40% (max±1.8mm)
	Modulus Of Rupture	Min 35 N/mm²	Min 35 N/mm²
	Scratch (Moh's Hardness Scale)	Min 6	Comply
	Abrasion Resistance (PEI)	Class I ~ IV	Comply
	Chemical Resistance To		
	a) Acid	GLA ~ GLC	Comply
	b) Alkaline	GLA ~ GLC	Comply
	Chemical Resistance To Stain	Min Class 3	Min Class 3
	Crazing Test	No Crazing	No Crazing (3 times)

* Free from visible defect

ALPHA PACKAGING SPECIFICATION										
DIMENSION	CARTON			PALLET			CONTAINER			
	Pieces	Weight(kg)	Sq.Meter	Cartons	Weight(kg)	Sq.Meter	Cartons	Pallets	Sq.Meter	Gross Weight(kg)
300x600mm Bla	8	29.3	1.44	40	1197	57.60	720	18	1036.80	21546
300x300mm Bla	16	25.4	1.44	72	1854	103.68	792	11	1140.48	20394

Remarks:
The "kg/pallet" is included 25kg pallet weight | Bla=<0.1% water absorption | B1b=>0,5 to <3% water absorption

V1

UNIFORM
SHADE & TONE

V2

SLIGHT
VARIATION

V3

MEDIUM
VARIATION

V4

STRONG
VARIATION